

THE FOLLOWING PAGE CONTAINS THE CONNECTION DETAILS

It is your responsibility to ensure that the transducer identification matches the connection details, including any RDP modification (T.M) references.

Please ensure that the transducer has not been modified or fitted with a cable or extension.

Particularly on DC-DC powered transducers, incorrect connection may cause **IRREPERABLE DAMAGE** to the transducer which is **NOT COVERED BY WARRANTY**


IF YOU ARE IN ANY DOUBT PLEASE CONTACT US



ACW SERIES

(LVDT - CABLE OPTION 1, PINS ONLY)

CONNECTION DETAILS

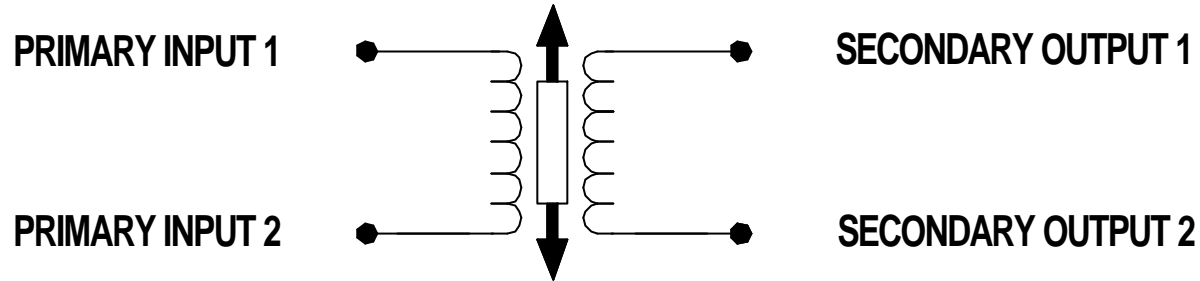

| | PIN | FUNCTION | SIZE |
|-----------------------|-----|-----------------|-------------------------|
| 5 PIN TYPE | 1 | No connection | 16SWG (1.625mm, 0.064") |
| | 2 | Sec. output 1 | 18SWG (1.219mm, 0.048") |
| | 3 | Primary input 1 | 18SWG (1.219mm, 0.048") |
| | 4 | Primary input 2 | 18SWG (1.219mm, 0.048") |
| | 5 | Sec. output 2 | 18SWG (1.219mm, 0.048") |

ENERGISING SUPPLY : 0.5 to 7V r.m.s. 2 to 10kHz.

SENSITIVITY : Refer to RDP Calibration Certificate.

PHASING : With Prim. 1 and Sec. 1 commoned, o/p in phase with excitation for outward stroke.

CALIBRATED : 5V, 5kHz energisation into 100k Ohms.

EXCESSIVE SOLDERING IRON HEAT APPLIED TO PINS WILL IRREPARABLY DAMAGE TRANSDUCER

RDP U.K.
Tel 01902 457512
Fax 01902 452000



Certificate No. FM 13141
 BS EN ISO 9001:2000

**MADE IN THE
 UNITED KINGDOM**

Doc. Ref. WDUK1402
 ISSUE 3 - 4 FEB 2004

RDP U.S.A.
Tel 610 469 0850
Fax 610 469 0852