


DR7 DIN Rail Mounting Amplifier

- LVDT amplifier
- Strain gauge transducer amplifier
- Input/output isolation
- Simple trimpot controls
- Voltage / 4-20mA output
- DIN rail mounting Amplifier


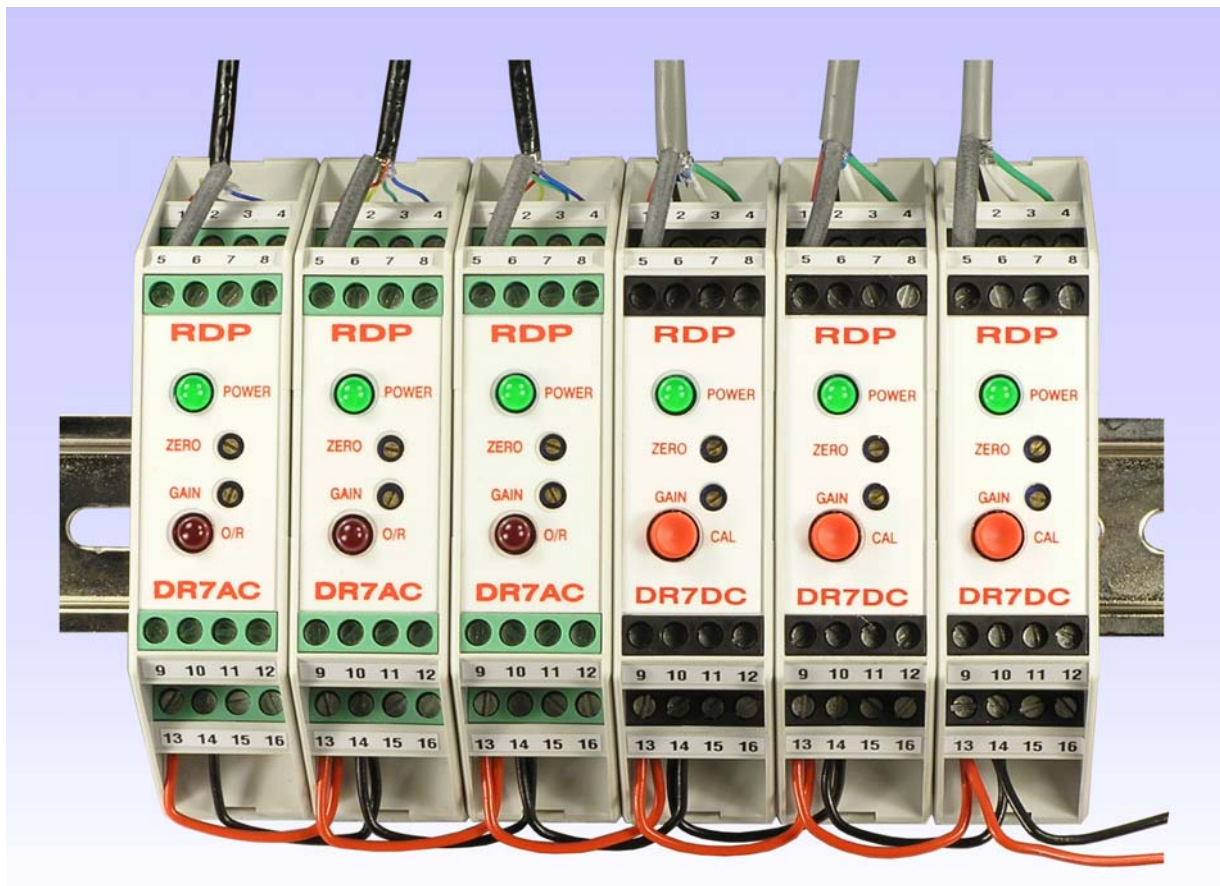


The DR7 is a DIN rail mounting amplifier designed to install in suitable cabinets along with other similar devices.

To reduce electrical noise, system problems and the risk of accidental damage the DR7 has full isolation between supply and output.

A wide supply voltage tolerance and selectable excitation ensure that the DR7 is compatible with a very wide selection of transducers and applications.


DR7AC dc powered LVDT transducer amplifier.

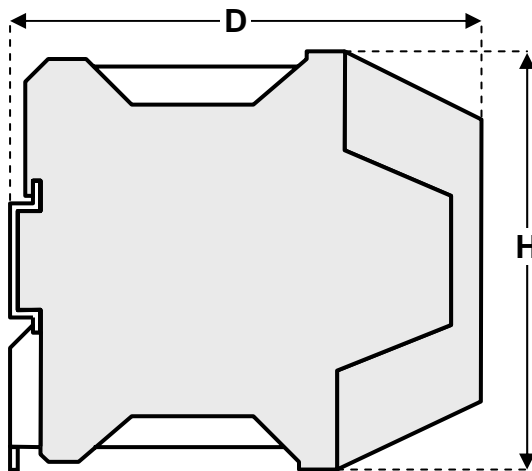

Dimensions	
D	115mm
H	99mm
W	23mm

Compatible with	Any standard RDP LVDT (without integral electronics) LIN & PY When fitted with two 1k Ohm bridge completion resistors (Does not provide analogue voltage linearisation for PY) Most LVDTs from any manufacturer
Supply voltage	9V to 36V dc, 250mA
Transducer excitation	1/3V (user selectable), 25mA 3/5kHz (user selectable)
Output details	0 to 10V, 5mA (isolated) ±10V, 5mA (isolated) 4-20mA (loop resistance 100 Ohms to 500 Ohms) (isolated)
Signal input range	20mV to 4V
Linearity error	±0,1% F.S.
Electrical output bandwidth	0 to 250Hz
Output ripple	5mV rms typical / 20uA rms typical
Input impedance	±130k Ohms
Temperature coefficient (combined zero and span)	±0,01% F.S. /°C minimum
Operating temperature range	-10°C to 60°C
Total weight	125g

DR7DC dc powered strain gauge transducer amplifier.

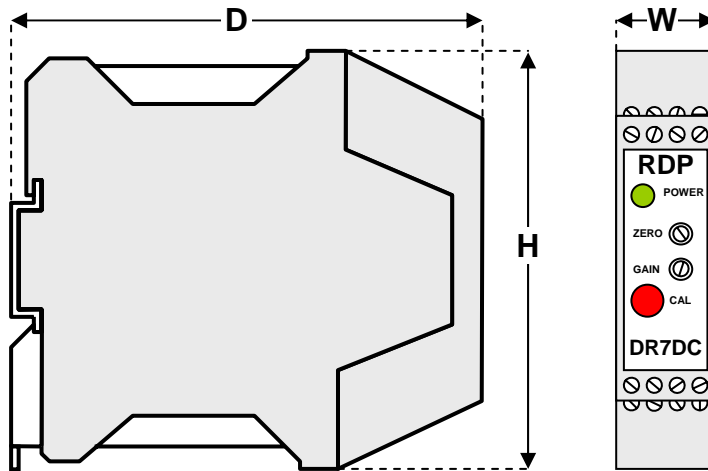

Dimensions	
D	115mm
H	99mm
W	23mm

Compatible with	Most full bridge strain gauge transducers
Supply voltage	9V to 36V dc, 120mA typical
Transducer excitation	3 to 10V (user selectable), 100mA maximum
Output details	0 to 10V, 5mA (isolated) ±10V, 5mA (isolated) 4-20mA (loop resistance 100 Ohms to 500 Ohms) (isolated)
Signal input range	4mV to 10V
Linearity error	±0,02% F.S.
Electrical output bandwidth	0 to 5k/500/20Hz(user selectable)
Output ripple	5mV rms typical / 20uA rms typical
Input impedance	10MOhms minimum
Temperature coefficient (combined zero and span)	±0,005% F.S. /°C minimum
Operating temperature range	-10°C to 60°C
Total weight	130g

All dimensions and specifications are nominal.

Due to our policy of on-going development, specifications may change without notice. Any modification may affect some or all of the specifications for our equipment.

Manufacturer
 RDP Electronics Ltd
 Grove Street, Heath Town
 Wolverhampton, West Midlands, WV10 0PY
 United Kingdom
 Tel: +44 1902 457512
 Fax: +44 1902 452000
 Email: sales@rdpe.com
 URL: www.rdpe.com

Distributor
 Transducer Technology
 PO Box 13592, Northmead
 Benoni, 1511, South Africa
 Tel: +27 11 425 2094
 Fax: +27 11 425 3359
 Email: sales@transducers.co.za