THE FOLLOWING PAGE CONTAINS THE CONNECTION DETAILS

It is your responsibility to ensure that the transducer identification matches the connection details, including any RDP modification (T.M) references.

Please ensure that the transducer has not been modified or fitted with a cable or extension.

Particularly on DC-DC powered transducers, incorrect connection may cause IRREPERABLE DAMAGE to the transducer which is NOT COVERED BY WARRANTY

IF YOU ARE IN ANY DOUBT PLEASE CONTACT US

DCW SERIES TM321A & B
(CABLE OPTIONS 2, 3, 4, 5, 8, 10 & 11)

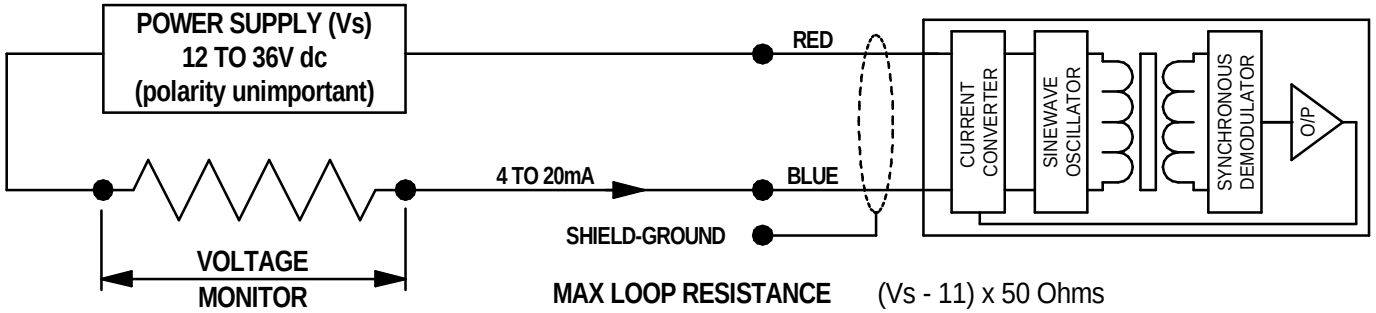

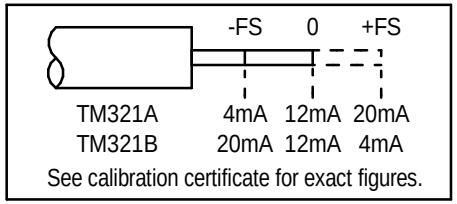

MAX LOOP RESISTANCE	(Vs - 11) x 50 Ohms (Including monitor and cable resistance)
BANDWIDTH	250Hz (flat)
NOISE	50uA peak to peak max
ZERO TEMPCO	0.01% F.S./°C (Typical)
SPAN TEMPCO	0.03% F.S./°C (Typical)
OPERATING TEMP	-10°C to +70°C
CALIBRATION	24V dc (see calibration certificate)
SUPPLY	Smooth d.c. voltage 12 to 36V

NOTE : INCORRECT CONNECTION MAY CAUSE IRREPARABLE DAMAGE
CONTACT OUR SALES DEPARTMENT IF YOU REQUIRE ASSISTANCE

RDP U.K.
Tel 01902 457512
Fax 01902 452000

bsi. ISO 9001 Quality Management
Certificate No. FM 13141
BS EN ISO 9001:2008

MADE IN THE UNITED KINGDOM

Doc. Ref. WDUK1455
ISSUE 6 - 22 SEP 2014

RDP U.S.A.
Tel 610 469 0850
Fax 610 469 0852